



40030/NE Calabronet


design emiliana martinelli, andrea menchini, 2017

MODULE 40030/NE

Combinable swivel system, direct/indirect diffused light. Composed of two length of aluminium tubular profiles (70cm - 160cm) connected together with a particular joint (40032/NE) for different configurations. For G5 T5 8w/20w tube LED (40030/NE - 40031/NE) and ceiling stud for three profiles, to be fixed on the ceiling. Variation (40033/NE) with spots for light source LED integrated and electronic driver inserted into the stud, to be fixed on the ceiling or false ceiling for two contiguous modules.



40030/NE calabronet

family:	calabronet	Body Color:	●
Designers:	Emiliana Martinelli, Andrea Menchini	Body Materials:	aluminium
Utilization:	indoor		
Typology:	pendant		
Certifications:			
Market:	This item is available in the following countries: EUROPE		

Dimensions


Width:	-	Hole Diameter:	-
Height:	-	Hole Depth:	-
Length:	70 cm	Net weight:	1,3 Kg
Depth:	-		
Diameter:	4,5 cm		

Light Source

Watt:	8W
Lumen:	1100 lm
Light Source:	led
CRI:	>80
duration:	50000
CCT:	3000K
Energy degree:	A+

Device Specifications



Type of emission:	direct/indirect	Power cable length:	400 cm	Driver:	included
Power:	8W	Steel cable length:	350 cm	Power supply assembly:	external
Light output:	525lm	Glow Wire Test:	-	Power supply:	electronic dimmable power supply
Beam angle:	-	Impact Resistance:	-	Type of dimming:	-
				Voltage:	230V



Ceiling rose with 75W
driver



photometrics data

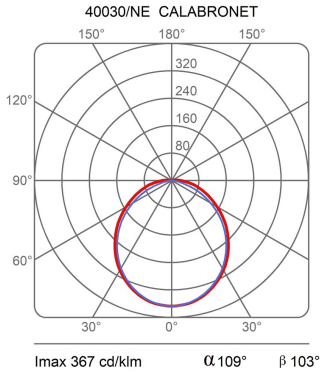



Calabronet 40030/NE

design emiliana martinelli, andrea menchini, 2017

