



BRICK 30 LED

SPECIFICATIONS

MOUNTING		WALL
POWER	[W]	18
LAMP		built-in LED
LUMINOUS FLUX*	[lm]	2160
LIGHT COLOUR	[K]	2700
CRI		>90
BEAM ANGLE	[°]	-
AVERAGE LIFETIME	[h]	L80/B50.000
LUMINOUS EFFICACY	[lm/W]	106
POWER SUPPLY	[V] [A]	220-240V AC 50/60 Hz
LED-DRIVER		INCLUDED
DIMMING		PHASE DIM
THROUGH-WIRING		NO
MATERIAL		ALUMINUM
INGRESS PROTECTION		IP20
PROTECTION CLASS		I
NET WEIGHT	[kg]	1,89
GROSS WEIGHT	[kg]	1,95
COLOUR (HOUSING)		WHITE ~RAL9003
COLOUR (HOUSING)		CHROME

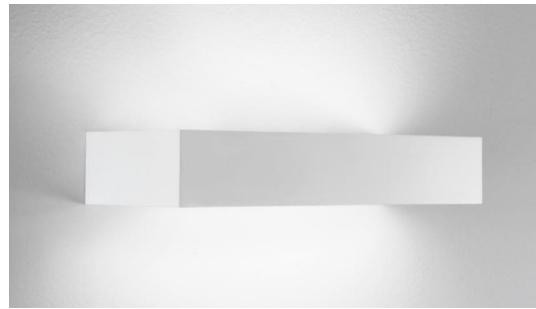

LIGHT DISTRIBUTION

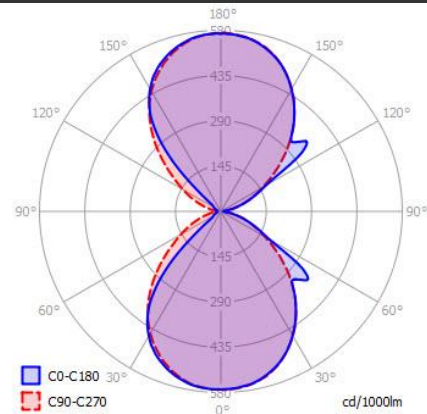


*Luminous flux values are nominal LED data at a operating temperature of 25° C

OPTIONS / OPTIONAL ACCESSORIES


Colours



MOUNTING DIMENSIONS (DRILLING TEMPLATE)

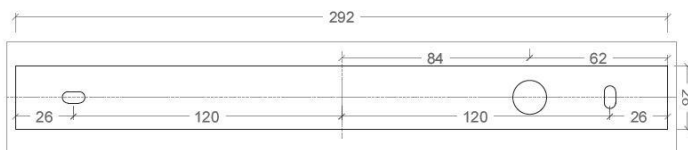

FIXTURE DIMENSIONS

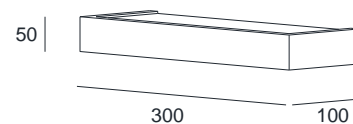

DLS LIGHTING


www.dslighting.com

***DLS**
LIGHTING


BRICK 30 G9

SPECIFICATIONS

MOUNTING		WALL
POWER	[W]	3xG9 LED
LAMP		NOT INCLUDED
LUMINOUS FLUX*	[lm]	-
LIGHT COLOUR	[K]	-
CRI		-
BEAM ANGLE	[°]	-
AVERAGE LIFETIME	[h]	-
LUMINOUS EFFICACY	[lm/W]	-
POWER SUPPLY	[V] [A]	220-240V AC 50/60 Hz
LED-DRIVER		-
DIMMING		SEE LAMP
THROUGH-WIRING		NO
MATERIAL		ALUMINUM
INGRESS PROTECTION		IP20
PROTECTION CLASS		I
NET WEIGHT	[kg]	1,60
GROSS WEIGHT	[kg]	1,65
COLOUR (HOUSING)		WHITE ~RAL9003
COLOUR (HOUSING)		GREY ~RAL9006
COLOUR (HOUSING)		CHROME

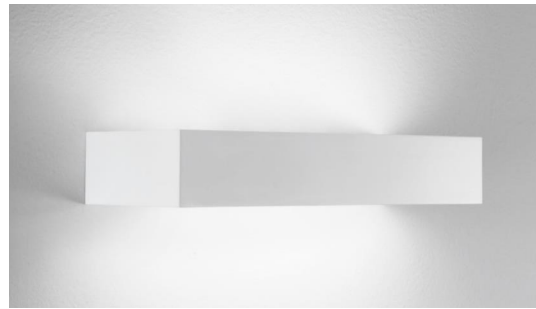

LIGHT DISTRIBUTION

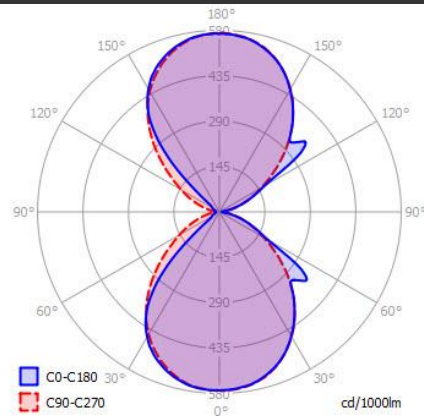


*Luminous flux values are nominal LED data at a operating temperature of 25° C

OPTIONS / OPTIONAL ACCESSORIES


Colours



MOUNTING DIMENSIONS

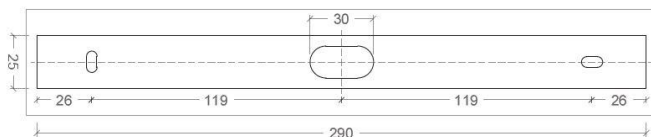

FIXTURE DIMENSIONS

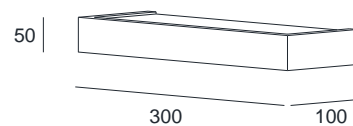

DLS LIGHTING

www.dslighting.com

***DLS**
LIGHTING