

ZOOM T FLEX

SPECIFICATIONS

| | | |
|--------------------|---------|----------------------|
| MOUNTING | | WALL |
| POWER | [W] | 2 |
| LAMP | | built-in LED |
| LUMINOUS FLUX* | [lm] | 190 |
| LIGHT COLOUR | [K] | 3000 |
| CRI | | >90 |
| BEAM ANGLE | [°] | 15 - 60 |
| AVERAGE LIFETIME | [h] | L80/B50.000 |
| LUMINOUS EFFICACY | [lm/W] | 95 |
| POWER SUPPLY | [V] [A] | 220-240V AC 50/60 Hz |
| LED-DRIVER | | INCLUDED |
| DIMMING | | NO |
| THROUGH-WIRING | | NO |
| MATERIAL | | BRASS / ALUMINIUM |
| INGRESS PROTECTION | | IP20 |
| PROTECTION CLASS | | I |
| NET WEIGHT | [kg] | 0,29 |
| GROSS WEIGHT | [kg] | 0,30 |
| COLOUR (HOUSING) | | BLACK ~RAL9005 |
| COLOUR (HOUSING) | | CHROME |
| COLOUR (HOUSING) | | PLATINUM |



LIGHT DISTRIBUTION

n/a

*Luminous flux values are nominal LED data at a operating temperature of 25° C

OPTIONS / OPTIONAL ACCESSORIES

2700K on request

Colours




black


chrome

platinum

MOUNTING DIMENSIONS



FIXTURE DIMENSIONS

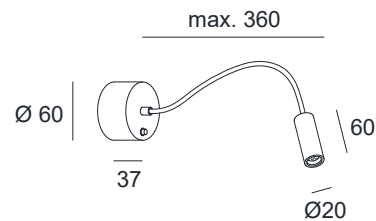

DLS LIGHTING

www.dslighting.com

***DLS**
LIGHTING